


# QuMax Omni for Teltonika TRB500

## INTEGRATED MULTI-BAND LTE & 5G OMNI ANTENNA + PLACE TO INSTALL TELTONIKA TRB500 (ALL-IN-ONE)

QuMax Omni is a 5G omnidirectional MIMO 4x4 antenna for the Teltonika TRB500 gateway. The antenna covers a wide frequency range from 617MHz (Band71) to 3.8GHz. Additional router compartment inside the housing creates a variety of new outdoor (IP67) scenarios. It is recommended for moving applications, like trains, buses, yachts or campers, but also to improve signal quality in rural areas.

NOTE! The antenna doesn't support B32 band and n77 (above 3800MHz) band!

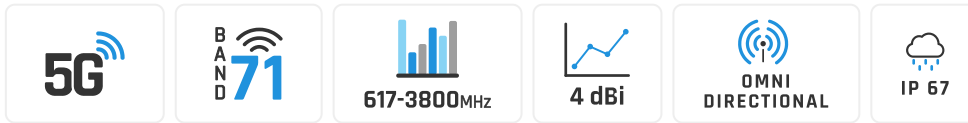

## LTE ANTENNA SPECIFICATION


<b>FREQUENCY</b>	0.617 - 0.96 GHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz 3.3 - 3.8 GHz
<b>GAIN</b>	0.617 - 0.96 GHz: 3 dBi 1.7 - 2.2 GHz: 3,5 dBi 2.3 - 2.7 GHz: 3,5 dBi 3.3 - 3.8 GHz: 4 dBi
<b>SUPPORTED LTE/5G BANDS</b>	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 23, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 48, 49, 52, 53, 59, 62, 65, 66, 67, 68, 69, 71, 85, n78, n80, n81, n82, n83, n84, n86, n89, n90, n95
<b>VSWR</b>	<1,80, max <2.00
<b>BEAMWIDTH</b>	360°/35° ±5°
<b>POLARIZATION</b>	Vertical
<b>IMPEDANCE</b>	50 Ω

## MECHANICAL SPECIFICATION


<b>MATERIALS</b>	ABS, aluminum, PTFE, Fiberglass
<b>CONNECTOR TYPE</b>	RJ45
<b>INGRESS PROTECTION</b>	IP67
<b>DIMENSIONS</b>	486.0 x 292.2 x 105.6 mm 19.13 x 11.50 x 4.16 inch
<b>WEIGHT</b>	2.5 kg 5.51 lbs
<b>OPERATING TEMPERATURE</b>	From -40°C to 70°C From -40°F to 167°F

## PLOTS


VSWR for LTE antenna

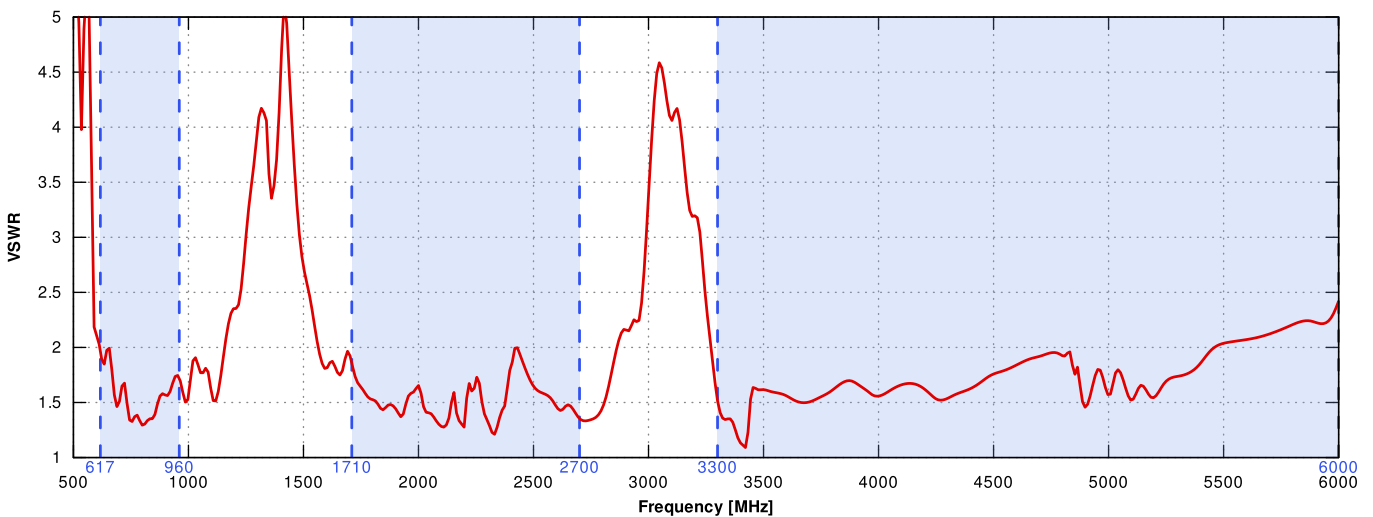



Gain for LTE antenna

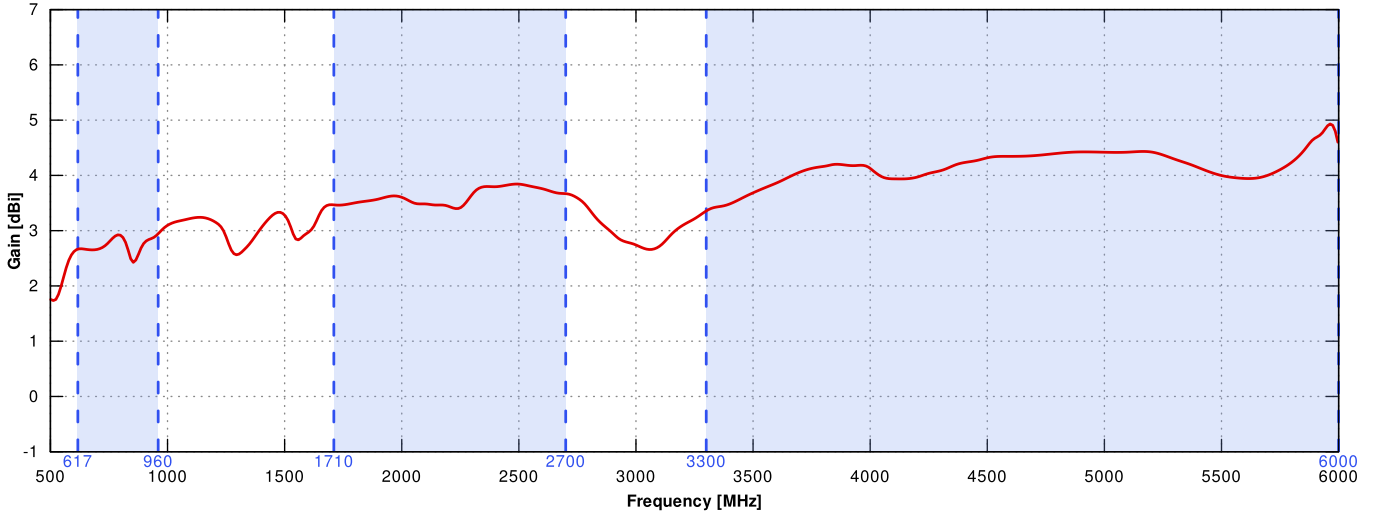



5G/LTE from 650MHz to 950MHz

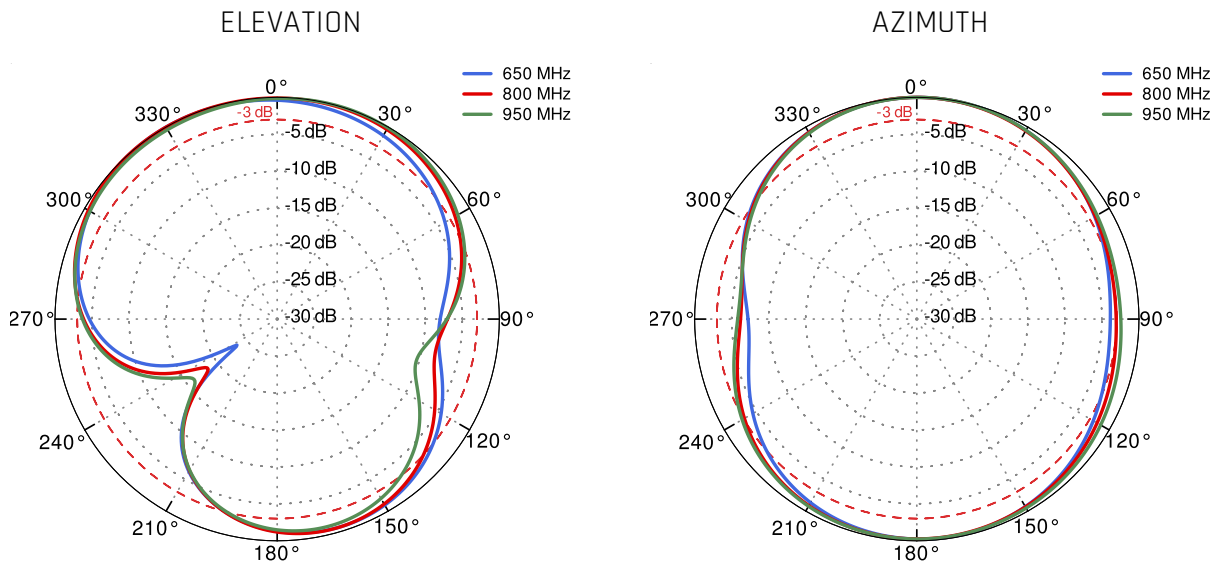


5G/LTE from 1.71GHz to 2.5GHz

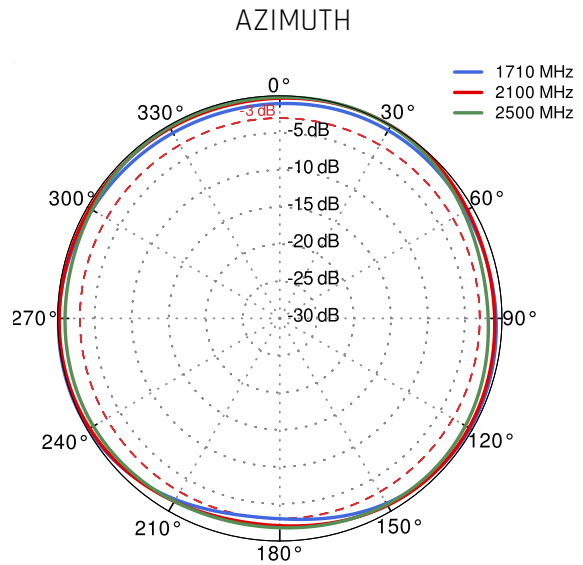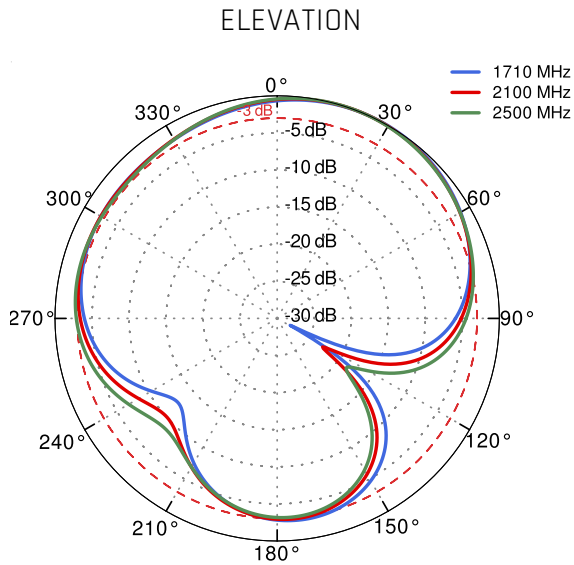

5G/LTE from 3.3GHz to 4.0GHz

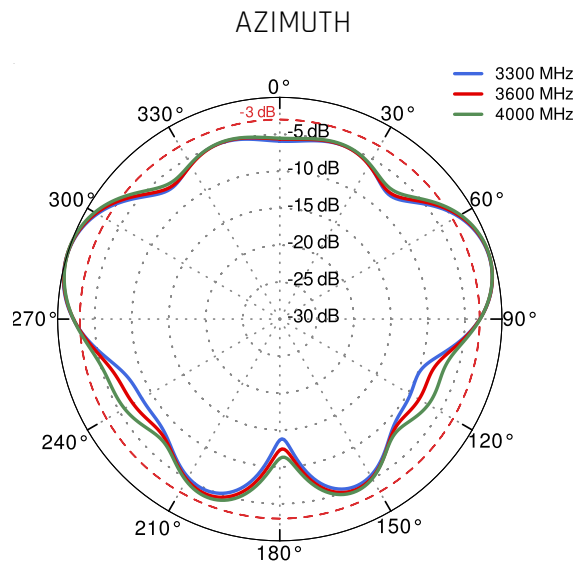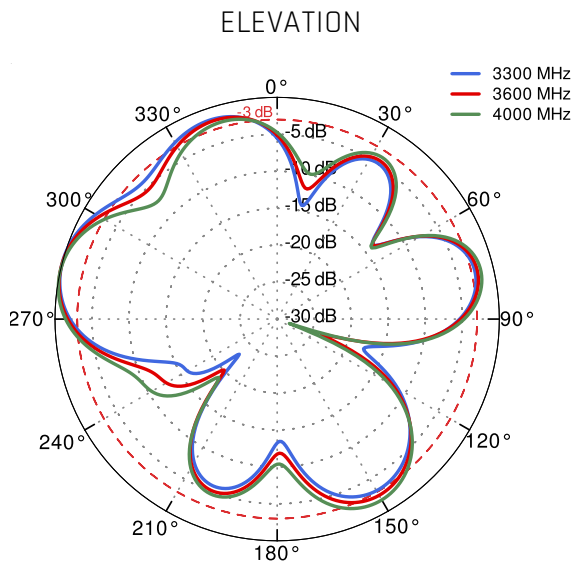

5G/LTE from 4.5GHz to 5.5GHz

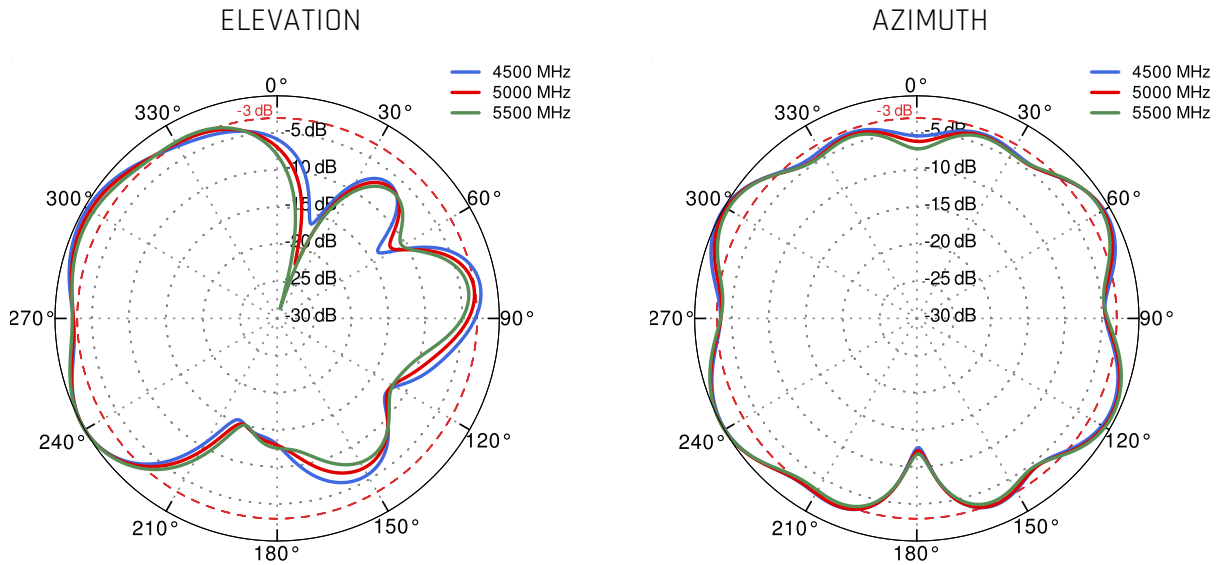

## **DIMENSIONS**

